



IMPORTANT SAFETY INSTRUCTIONS

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards please read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Installation and service of luminaires should be performed by a qualified licensed electrician.
- Maintenance of the luminaires should be performed by person(s) familiar with the luminaires' construction and operation and any hazards involved. Regular fixture maintenance programs are recommended.
- It will occasionally be necessary to clean the outside of the refractor/lens. Frequency of cleaning will depend on ambient dirt level and minimum light output which is acceptable to user. Refractor/lens should be washed in a solution of warm water and any mild, non-abrasive household detergent, rinsed with clean water and wiped dry. Should optical assembly become dirty on the inside, wipe refractor/lens and clean in above manner, replacing damaged gaskets as necessary.
- DO NOT INSTALL DAMAGED PRODUCT! This luminaire has been properly packed so that no parts should have been damaged during transit. Inspect to confirm. Any part damaged or broken during or after assembly should be replaced.
- Recycle: For information on how to recycle LED electronic products, please visit www.epa.gov.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, this matter should be referred to Deco Lighting.




WARNING

- These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with these instructions, current electrical codes and/or the current National Electric Code (NEC).
- To avoid electrical shock, disconnect or disable power at the source prior to installation or maintenance.
- To avoid electrical shock, and to assure proper operation, this fixture must be adequately grounded.
- To avoid electrical shock, use only with 120V AC plug-in power supply or with 120V AC hardwire power supply. Factory warranty will be void if used with a non-recommended power supply, transformer, or driver.
- To avoid electrical shock, and to assure proper operation, this fixture must be adequately grounded.
- 12-inch minimum spacing distance from luminaire required for all objects located under fixture.
- Linkable total wattage is 200 Watts.




Components

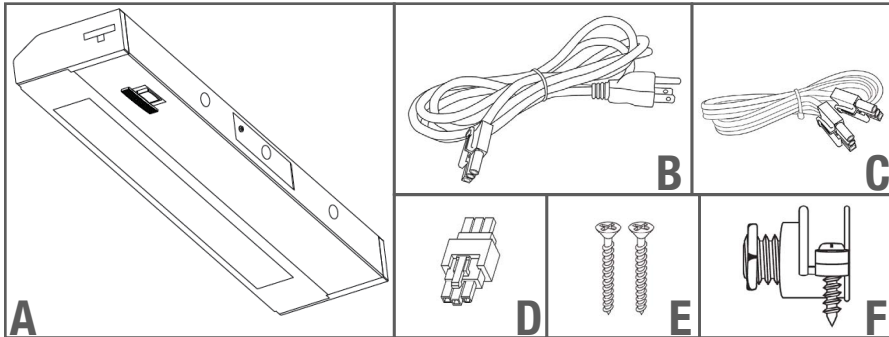


- A. Agilis Fixture
- B. 1 x 6' Power Cord
- C. Jumper Connector
- D. End to End Connector
- E. 2 x Screws
- F. Romex Connection Kit


Plug-In Installation

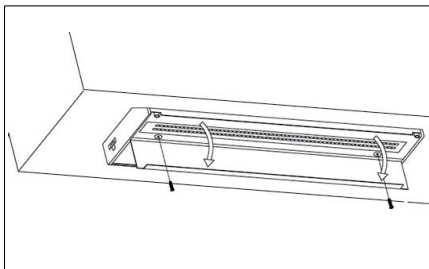


1. Fix the fixture to the unit using 2 fixing screws

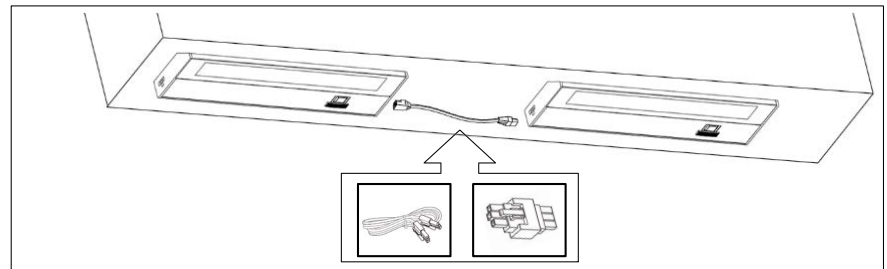

2. Connect the multiple fixtures by snapping the End to End Connector or Jumper Connector.

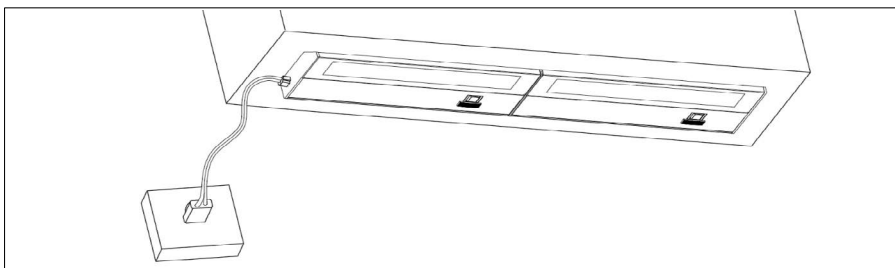


3. Finally wire the power cord to 120v mains supply.

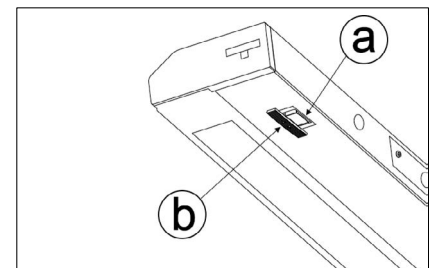


4. By flipping the switch (a) select between one of the 3 modes (Lo, Off, Hi). Switch (b) is used to change the color temperature of light delivered 3000K, 4000K & 5000K CCT respectively.




Hardwire Installation

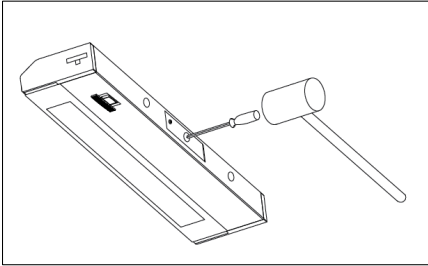


1. Remove the knock-out by hammering.

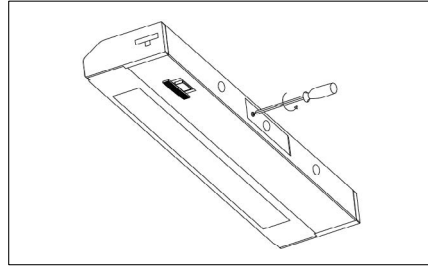


2. Disengage adapter plate by loosening screw.

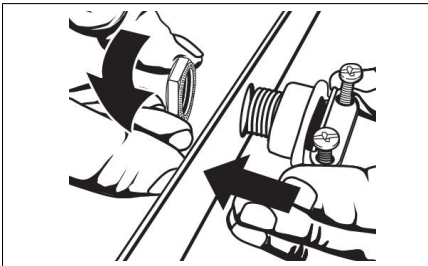

3. Insert romex connector into the housing open hole on the adapter plate. Secure it with the nut.

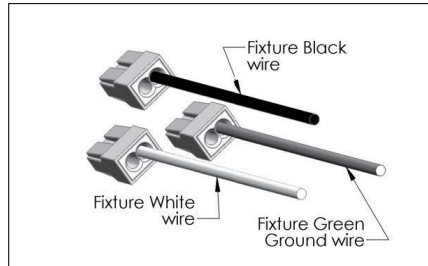


4. Pull 3 wires out of the fixture to allow connection to the branch circuit. Inserting wires into the open hole in the push-in wire connector.

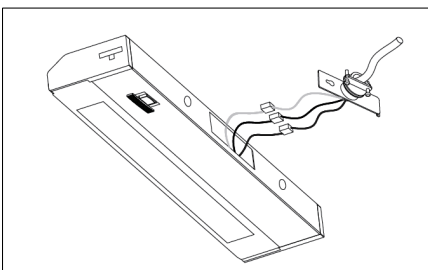

5. Connect the Green ground input supply wire to the fixture Green ground wire. Connect the White input supply wire to the fixture White wire. Connect the Black input supply wire to the fixture Black wire.

****Do not mix wires or change polarity.**

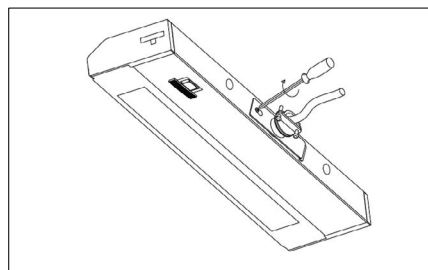

6. Feed wires back into fixture, reattach adapter plate tighten screw, and attach the fixture to the base of the cabinet, with screws.