



DECO® | LIGHTING


D470-LED

Medium Wall Pack



Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	

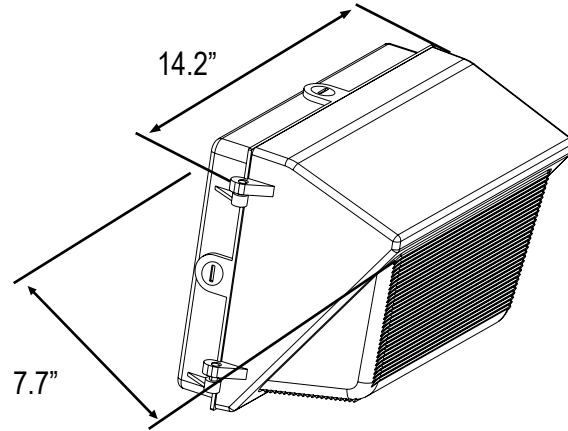

Description

The D470-LED medium wall pack provides a durable and efficient exterior light source for any application with maximum performance and minimum maintenance. The D470-LED delivers up to 110 lumens per watt of energy-efficient performance paired with a traditional design.

Ordering Information

Example: (D470-LED-40-50-U-BZ-T)

D470-LED [] [] [] [] []

Series	Wattage/Lumen	Color Temp.	Voltage	Finish	Options ³
Medium Wall Pack	40 40W/4700 ^{1,2}	50 5000K ²	U 120-277V	BZ Bronze	T Photocell

¹ Delivered Lumens (5000K)
² DLC Listed
³ Shipped separately

Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

©2018 Deco Lighting, www.getdeco.com T: (800) 613-DECO F: (310) 366-6855
Rev Date: 05/30/18 #1



Digitize your light.®


Features

- Standard color is bronze
- Heavy duty two piece die cast aluminium housing is top hinged for ease of maintenance. Two captive stainless steel door fasteners.
- .5" threaded conduit entry with coin plug.
- Clear prismatic borosilicate glass reflector is thermal/shock resistant.
- Computer designed and precision formed specular aluminium reflector.
- Dark bronze polyester powder finish for excellent impact, corrosion and UV resistance.
- Type IV very short IES distribution
- Weight: 7.7lbs
- 10-Year Limited Warranty


Photometric Data

40W 5000K

Polar Candela Distribution

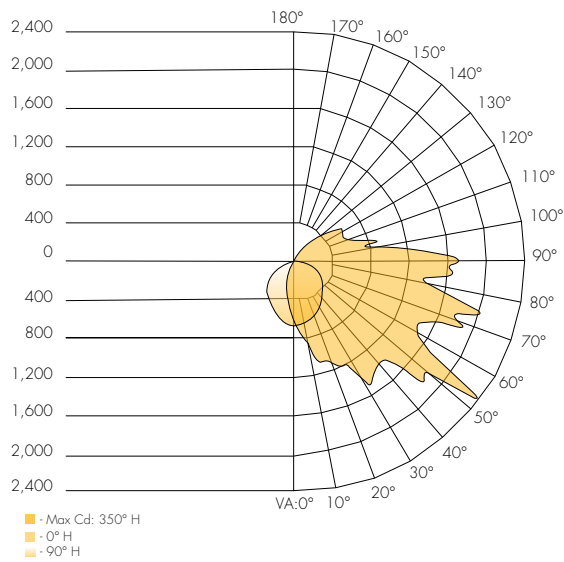

Isolux Plot

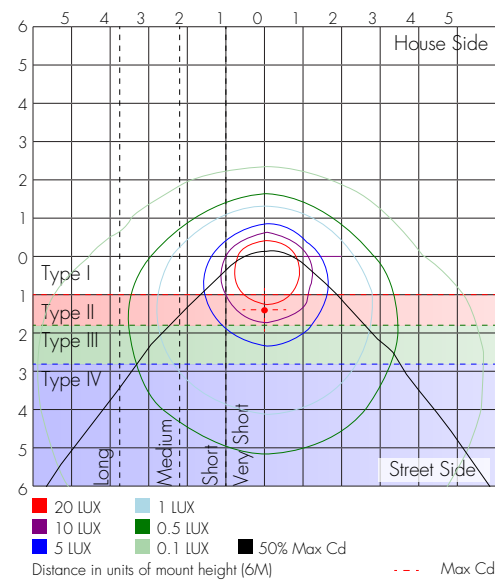

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	547.1	11.7%
0-40	950.7	20.2%
0-60	2,015.3	42.9%
60-90	1,638.8	34.9%
70-100	1,504.0	32%
90-120	772.6	16.5%
0-90	3,654.1	77.8%
90-180	1,041.0	22.2%
0-180	4,695.1	100%

Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

©2018 Deco Lighting, www.getdeco.com T: (800) 613-DECO F: (310) 366-6855
Rev Date: 05/30/18 #1

Performance Data

CRI:	84
CCT:	5000K
Dimming:	0-10V Dimming Standard, 100% down to 10%
Operating Temperature:	-40°C to 40°C Max Ambient
IP Rating:	IP65
Power Factor:	> 0.90
Total Harmonic Distortion (THD):	< 20%
System Wattage	43.1 watts