



**DHBX-LED  
High Bay**

**IMPORTANT SAFETY INSTRUCTIONS**

1. Read carefully before installing fixture. Retain for future reference.

**⚠ WARNING** To prevent electrical shock, turn off electricity at fuse box before proceeding.

2. Failure to follow instructions may result in serious injury or death.


3. Upon receipt the fixture, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier. Compare the catalog description listed on the package slip with the fixture label on the housing to assure you have received material.

4. This fixture must be wired in accordance with the international electrical code and applicable local codes and ordinances. Proper grounding is required to insure personal safety. Carefully observe the correct grounding procedure under installation section.

5. DECO luminaires may be damaged if connected to conduit systems containing water - Article 300-5G of National Electric Code requires that “Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends”.

\*Deco Lighting assumes no responsibility for claims arising out of improper or careless handling or installation of this product.

**General Wiring Diagram**

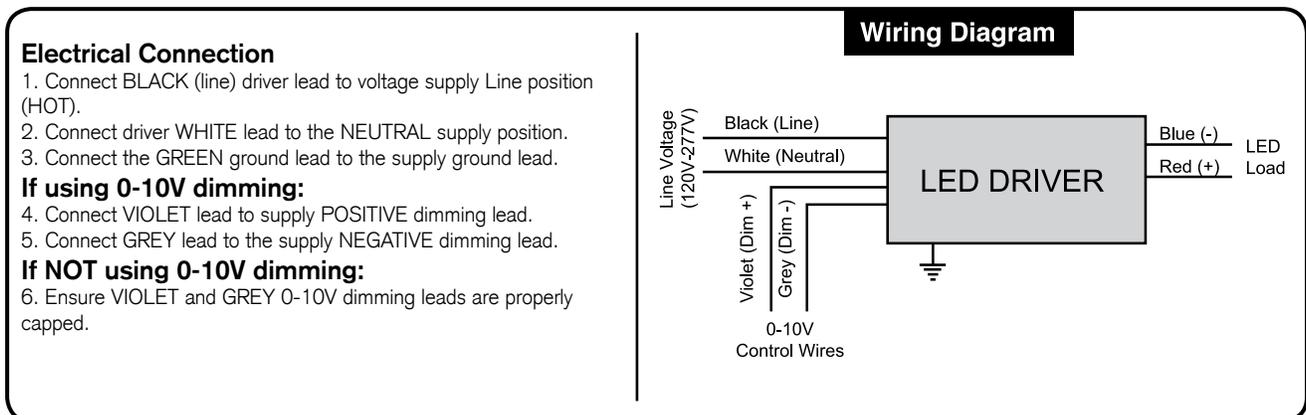




## DHBX-LED High Bay

### Slipfitter Installation:

1. Mount Mono Point Crossbar as shown to 4" octagonal or 4" square box. \*Tip: If you back off screws on crossbar then MP Plate will slide closer to J-Box. Remember to tighten crossbar screws when MP Plate, J- Box and MP Crossbar are in place.
2. Assemble stem into fixture with locknuts and pull wiring conductors out 6" longer than stem.
3. Insert canopy over stem.
4. Thread MP-Plate onto stem and use locknut on inside to lock into place.
5. Make electrical connections and grounding while holding up fixture.
6. Hinge MP-Plate as shown above on inside of MP Crossbar. Slide the plate in so the tapped screw holes on the other side of the plate align with the crossbar. Fasten in place with 8/32" screw.
7. Push canopy to junction box and fasten to crossbar using 2-6/32" screws
8. Insert the Philips Tap Caps to the top of the Philips screws on the canopy.

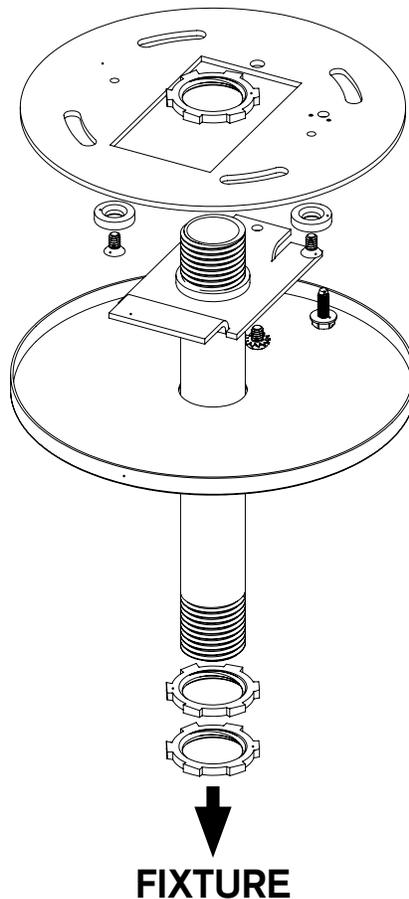

### NOTE:

Assembly is rated for 50 lbs. Static Loads Only (No dynamic or moving loads)  
Not for chemical or pool corrosive environments

*Deco Lighting practices a program of continuous product improvement, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.*