



DECO® | LIGHTING



DSW-LED

Surface Wraparound



Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	

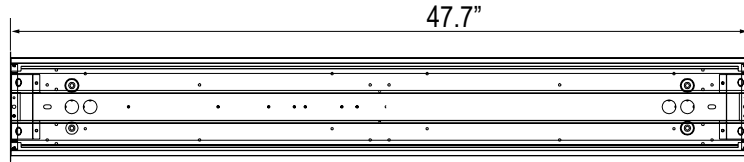

Description

The DSW series wraparound pairs economy styling with energy-efficient performance, delivering 130 lumens per watt. The luminaire's characteristic clean, low-profile design is both appealing and practically functional. This unit utilizes a clear, extruded acrylic refractor and a heavy gauge steel end plate with embossed light seal for dependable performance and good looks. The DSW wraparound is perfect for commercial spaces, school dormitories, offices and retail areas.

Features

- Die formed heavy gauge steel with side flanges for extra uniformity and rigidity.
- Driver cover snaps into housing to cover ballast and wires.
- Fixture ends are die-formed for rigidity.
- Post painted powder coated white finish.
- Diffuser is designed for one-piece .125" thick prismatic lenses.
- Snap on diffusers for easy servicing and hinge from either side.
- UL listed for damp locations.
- Dimming (0-10V) standard
- 84 CRI for crisp, accurate color rendering

Ordering Information

Example: (DSW-LED-4-35-40-UNV-DM)

DSW-LED [] [] [] [] [] [] []

Series	Length	Wattage/Lumen	Color Temp.	Voltage	Dimming	Option
Surface Wraparound	4 4'	35 35W/4420 ^{1,2}	40 4000K	UNV 120-277V	DM Dimming (0-10V)	CSC EM Control Scope Connected Emergency

¹ Delivered Lumens (4000K)

² DLC-listed wattage (See page 2 for additional info on models currently listed)

Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

©2018 Deco Lighting, www.getdeco.com T: (800) 613-DECO F: (310) 366-6855 Rev Date: 04/04/17 #6



Digitize your light.®

Performance Data

CRI:	84
CCT:	4000K
R9 Value:	18
Warranty:	10-Year Warranty w/Labor Allowance
Dimming:	0-10V Dimming Standard
Operating Temperature:	-20° to +50°C Ambient
Projected Lifetime:	224,000 Hours (L80); 112,000 Hours (L90)
System Wattage:	32 watts
Power Factor:	>0.95
Total Harmonic Distortion (THD):	<10%

DLC Listing

	4' 35W
4000K	X

Projected LED Maintenance

Operating Hours	0	25,000	50,000	100,000	150,000
	25°C Ambient Interior Temp (77°F)				
Lumen Maintenance Factor	1	0.99	0.96	0.91	0.87
	45°C Ambient Interior Temp (113°F)				
Lumen Maintenance Factor	1	0.97	0.92	0.83	0.74