



DSW-LED

Surface Wraparound

Client: _____
Project Name: _____

Order #: _____
Type: _____ Qty: _____

Performance Data

CRI
84

CCT
4000K

Projected Lifetime

224,000 Hours (L80);
112,000 Hours (L90)

Dimming


0-10V Dimming Standard

Operating Temperature

-20° to +50°C Ambient

UL Listed

UL, Suitable for dry and damp locations

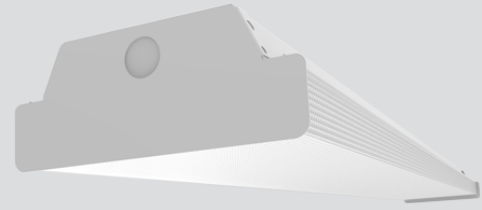


UL Listed	DLC Premium	10 Yr Warranty Including Labor	USA Buy American Act Compliant
---------------------	-----------------------	---	---

Description

The DSW series wraparound pairs economy styling with energy-efficient performance, delivering 130 lumens per watt. The luminaire's characteristic clean, low-profile design is both appealing and practically functional. This unit utilizes a clear, extruded acrylic refractor and a heavy gauge steel end plate with embossed light seal for dependable performance and good looks. The DSW wraparound is perfect for commercial spaces, school dormitories, offices and retail areas.

Features

- Die formed heavy gauge steel with side flanges for extra uniformity and rigidity.
- Driver cover snaps into housing to cover ballast and wires.
- Fixture ends are die-formed for rigidity.
- Post painted powder coated white finish.
- Diffuser is designed for one-piece .125" thick prismatic lenses.
- Snap on diffusers for easy servicing and hinge from either side.
- UL listed for damp locations.
- Dimming (0-10V) standard
- 84 CRI for crisp, accurate color rendering




Ordering Information

A FIXTURE SERIES	DSW-LED Surface Wraparound	F DIMMING	DM Dimming (0-10V)
B LENGTH	4 4'	G OPTIONS	T Control Scope Connected
C WATTAGE/LUMENS	35 35W/4420 ^{1,2}	E	Emergency Battery
D CCT	40 4000K		
E VOLTAGE	UNV 120-277V		

¹ Delivered Lumens (4000K)


² DLC-listed wattage (See page 2 for additional info on models currently listed)

Dimensions

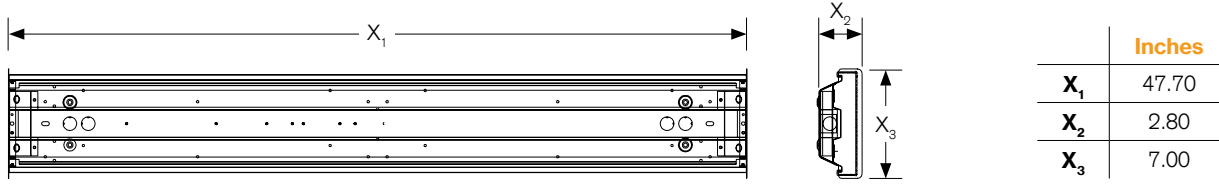

Photometrics

Model 4' 35W 4000K

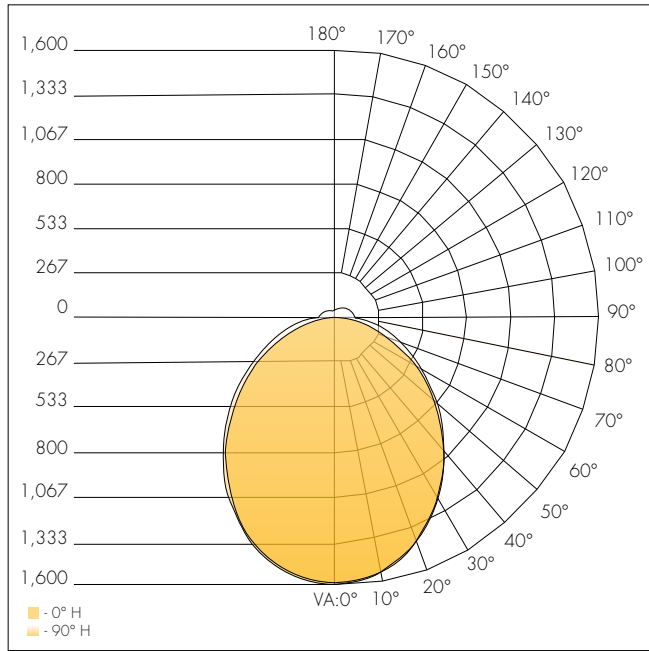

Zonal Lumen Summary

Zone	Lumens	%Luminaire
0-30	1,188.2	26.8%
0-40	1,904.7	42.9%
0-60	3,231.7	72.9%
60-90	910.2	20.5%
70-100	507.5	11.4%
90-120	178.8	4%
0-90	4,141.9	93.4%
90-180	293.9	6.6%
0-180	4,435.8	100%

DLC Listed

	4' 35W
4000K	X

Projected LED Maintenance

Operating Hours	0	25,000	50,000	100,000	150,000
Lumen Maintenance Factor	25°C (77°F) Ambient Outdoor Temp				
	1	0.99	0.96	0.91	0.87
	45°C (113°F) Ambient Outdoor Temp				
	1	0.97	0.92	0.83	0.74

Compatible Drivers

Brand	EASEIC	LEVITON
Models	EID110U	AWSMT716