


MOUNTING OPTIONS



Pendant Mount

Available in Direct or Direct/Indirect, the Vector family is an excellent choice for general office illumination. The aircraft cable mounts slide along the length of the housing, allowing flexibility in the mounting point location.


Surface Mount

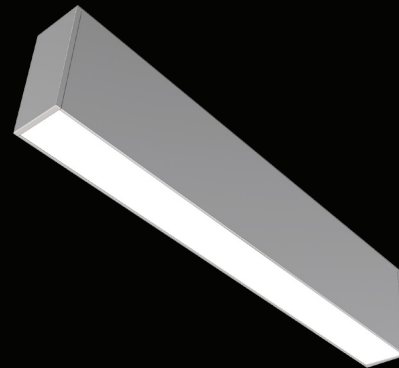

The surface mount Vector is ideal for locations with low ceilings or where fire ratings prevent recessed luminaires. One of many options for applying the Vector on walls and ceilings to enhance architectural details or add to interior design elements.


Wall Mount

Available in Direct or Direct/Indirect, the Vector family can be wall mounted to be used in areas such as corridors. The wall side bracket mounts to standard octagonal junction boxes and wiring can pass through the bracket into the luminaire.

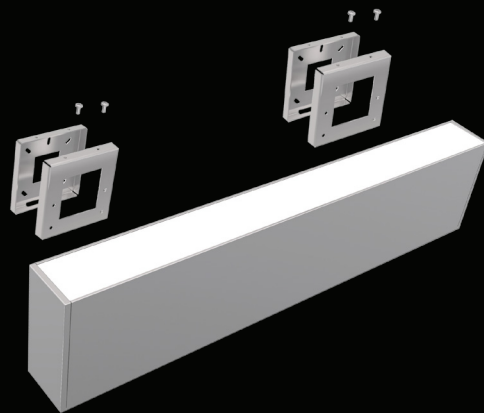


Recessed T-Bar

Available for three types of T-bar: 15/16", 9/16", and 9/16" screw slots. Supported by the ends, the Vector can be positioned in any area on the grid, allowing interesting staggered patterns of lights.

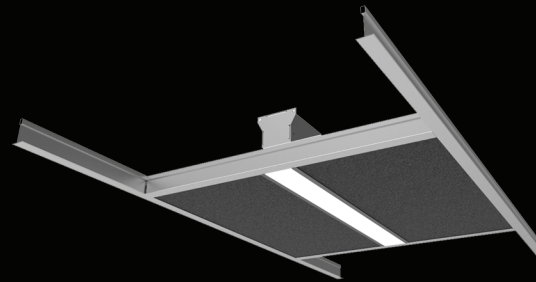


Recessed Hard Ceiling

The recessed version of Vector has a slim elegant flange to finish the opening in the drywall. Vector can either mount via threaded rods or fasteners or using the Vector slip through bracket.

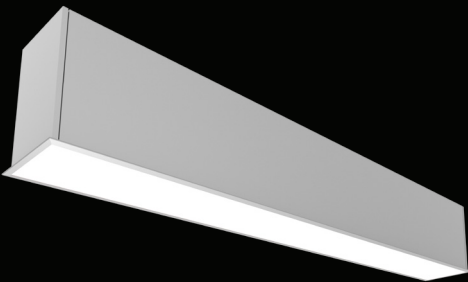

ACCESSORIES

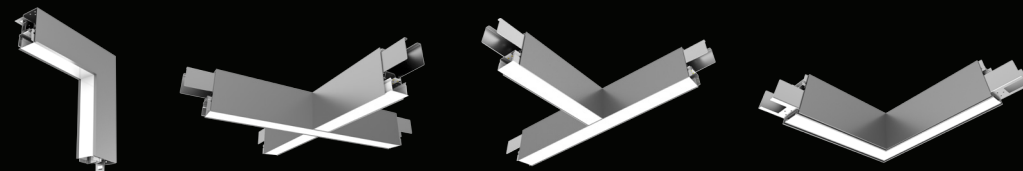

Wall to Ceiling

Cross

Tee

Lit Corner



V1


V2

V3


VECTORTM
Architectural LED Luminaire

Life is about using the whole box of crayons...


A-CLASSIC

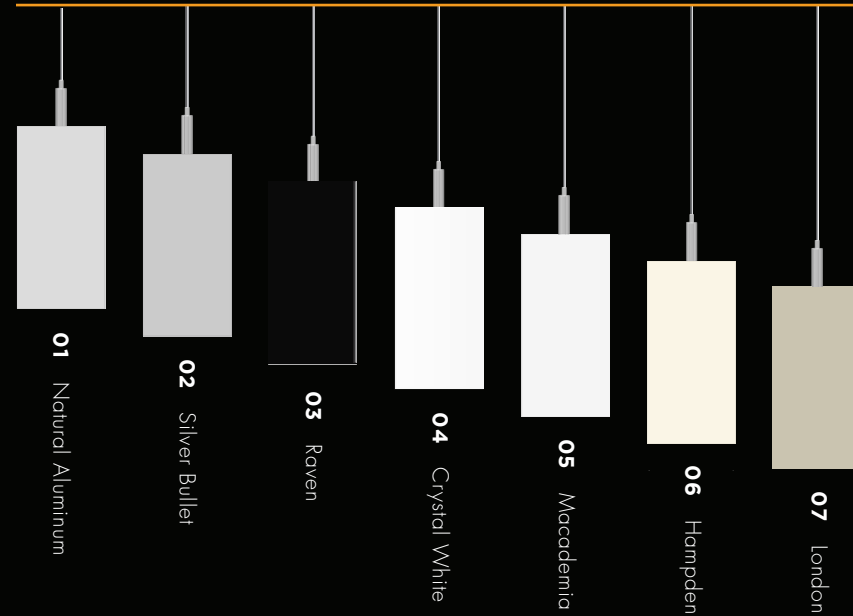

B-URBAN

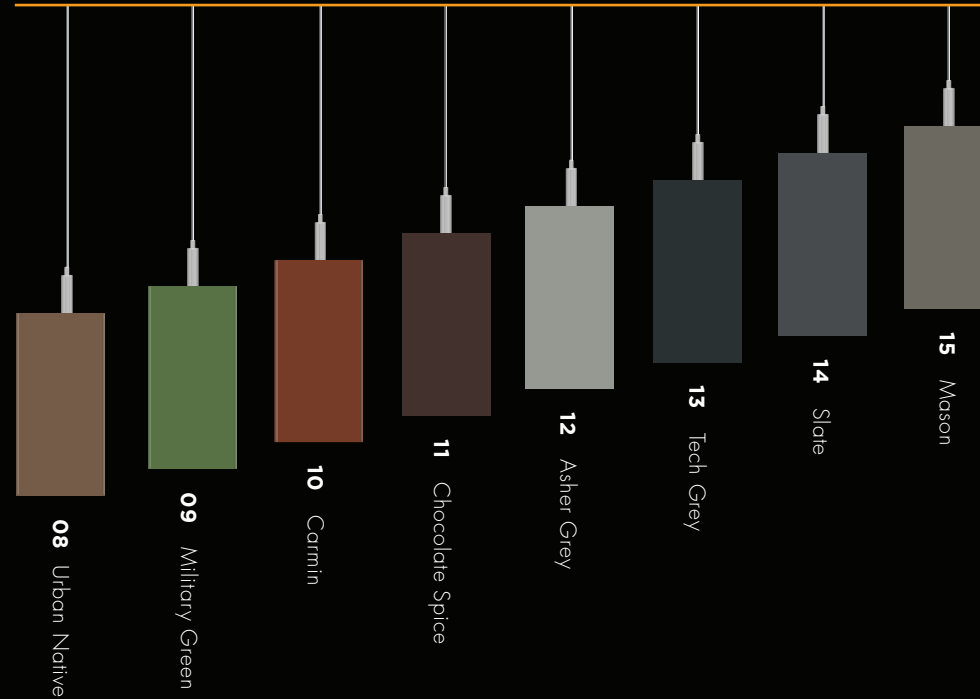

C-FRESH

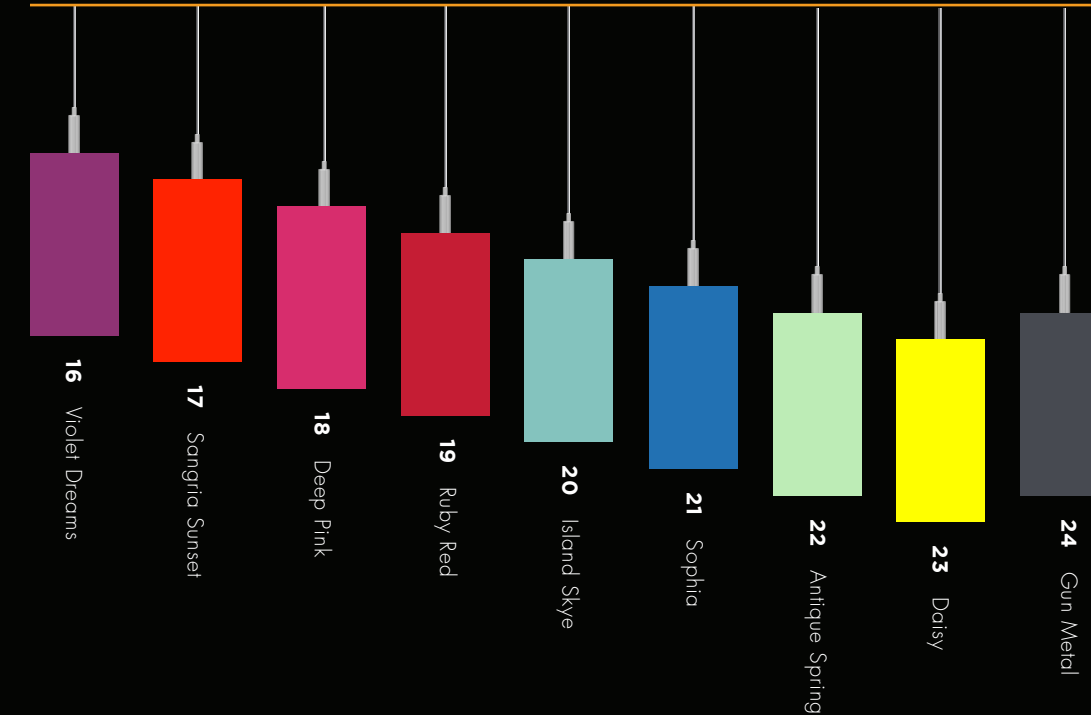

Introducing Vector, a linear LED luminaire family designed to integrate into any modern interior design. The Vector is a system of modular linear sections that can be combined to create almost any configuration imaginable. With three aperture sizes, the Vector comes in standard lengths of 2ft, 3ft, 4ft, 6ft, and 8ft; it can also be joined to create run lengths in one-foot increments. While many manufacturers offer only white, silver, and black as standard finishes, Deco Lighting offers white, silver and black as standard colors with 24 other special standardized finishes also available. Since the Vector is built-to-order, the 24 special colors extend lead time by only a few days as they are maintained in stock batches, allowing paint time to be virtually the same as the three standard colors.

The Vector enables designers to create their dream layout without skyrocketing costs or drastically extending lead times, envisioning a system of Endless Possibilities.

Features


PERFORMANCE

- Up to 900 lm/ft direct, 1,200 lm/ft indirect on the highest setting.
- CCT: 2700K, 3000K, 3500K, 4000K, 5 Channel Color Tuning.
- CRI: 95 min with a R9 of 69 or better.
- Certifications: ETL approved for dry and damp locations.

PHYSICAL


- End caps: Die-cast aluminum with powder coat finish.
- Housing: Extruded Aluminum with powder coat finish.
- Direct lens: Extruded Satin Acrylic.
- Indirect lens: Extruded clear Acrylic.
- Light Engine: Aluminum core LED board mounted to a white extruded chassis with integral driver and quick electrical disconnects for rapid tool-less servicing.
- Weight: 30 pounds (8ft luminaire).

Profile Dimensions

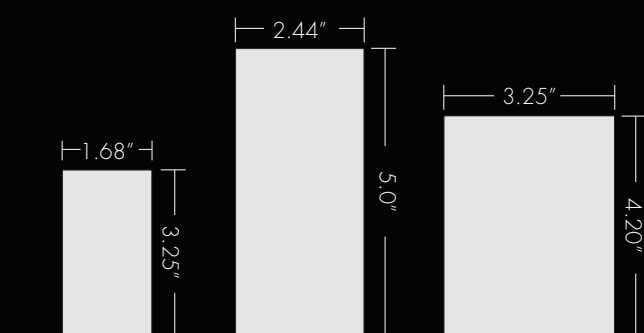


DECO® | LIGHTING


Color Temperature Options

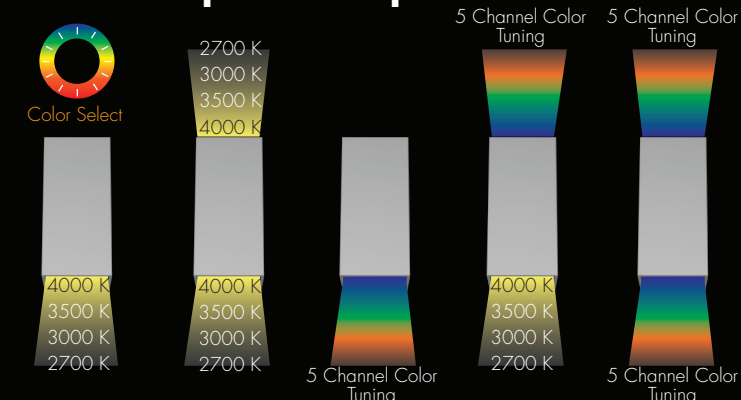

STANDARD VECTOR SHAPES

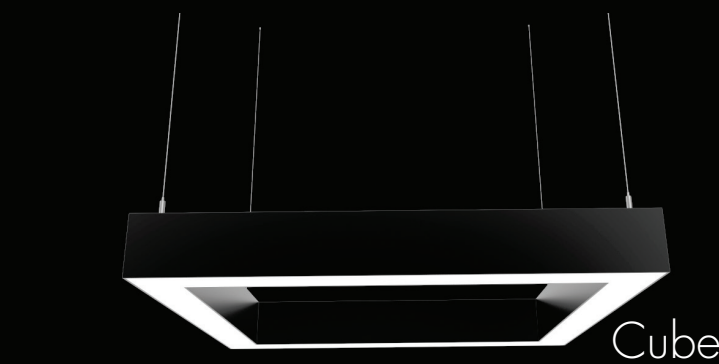

Cube

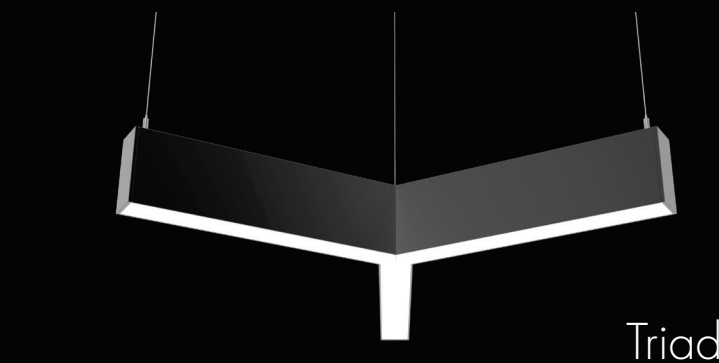

Triad



Hex