



DECO® | LIGHTING

WC-200

LED Driver

Job Information


Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	



Electrical Specifications:


Output Power Max (W)	Output Voltage (V)	Output Current (A)	Min. Start Temp. (F/C)	Tcase Temp. Max. (F/C)	Input Current (A)	Input Power (W)	THD Max. (%)	Power Factor Min.	Efficiency Max (%)
200	120-200	1000mA +/- 5%	-40/-40	194/90	1.78@120V 0.78@277V	215	<20	>0.9	93

Wiring:

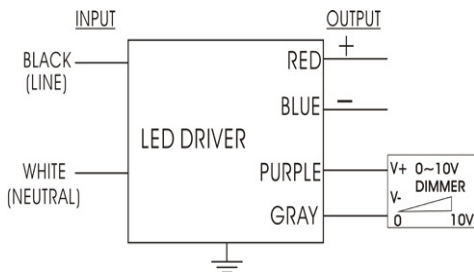

Black	White	Green	Red	Blue	Purple	Gray
5.9"	5.9"	5.9"	5.9"	5.9"	7.1"	7.1"

Physical:

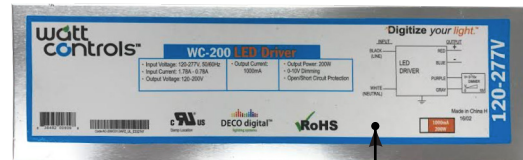

Hot Spot

Overall (L)	Width (W)	Height (H)	Mounting (M)
24.1 cm	6.7 cm	4.06 cm	22.6 cm
9.5"	2.64"	1.6"	8.9"

Safety & Performance

- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C

- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of ≤75°C; 3 yrs based on max case temp of 90°C*

- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

Installation

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required for installation

- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

©2016 Deco Lighting, www.getdeco.com T: (800) 613-DECO F: (310) 366-6855

Digitize your light.®