


**DECO WATT CONTROL
ZIGBEE LED Driver**


Transforming tomorrow's lighting....today!



Job Information
Type:
Catalog #:
Project:
Comments:
Prepared by:

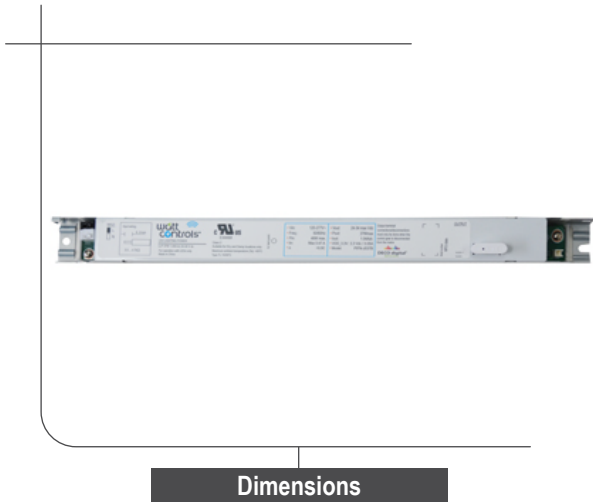

WIRING:

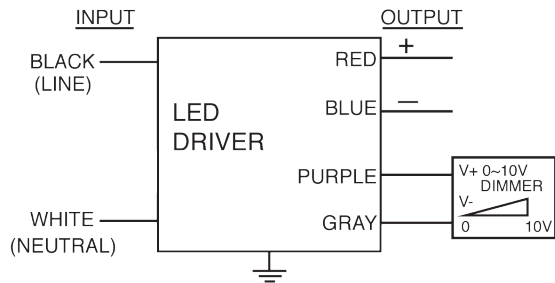

Lead Lengths

Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

Dimensions			
Length	14.17"	Mounting Length	8.9"
Width	1.18"	Weight	xx lbs.
Height	1.02"	Case Qty.	xx pcs.

ELECTRICAL SPECIFICATIONS:

Output Power Max.	Input Power	Input Current	Minimum PF (fullload)	Max. THD (fullload)	Output Voltage	Output Current	T case Max.	Minimum Starting Temp.	Efficacy Up To	Dimming Protocol	Dimming Range
35W	46W	120-277V	>0.9	25%	24-34V	1.04A	85°C	-20°C	80%	0 to 10V	10 to 100%

SAFETY & PERFORMANCE:

- Dimming Method: ZigBee, BLE, Z-Wave
- Constant Current Control
- Cost Effective Solution with Single Stage Topology
- Protection: OVP,SCP and OTP
- UL8750, UL1310, CSA C22.2 No.250.13.-12, CSA C22.2 No.223, Class 2 Output Safety Certification Approved
- RoHS Compliant