

Circa

Ambient Interior Luminaire

Installation Instructions

IMPORTANT SAFETY INSTRUCTIONS

1. Read carefully before installing fixture. Retain for future reference.

WARNING To prevent electrical shock, turn off electricity at fuse box before proceeding.

2. Failure to follow instructions may result in serious injury or death.

3. Upon receipt the fixture, thoroughly inspect for any freight damage which should be brought to the attention of the delivery carrier. Compare the catalog description listed on the package slip with the fixture label on the housing to assure you have received material.

4. This fixture must be wired in accordance with the international electrical code and applicable local codes and ordinances. Proper grounding is required to insure personal safety. Carefully observe the correct grounding procedure under installation section.


5. DECO luminaires may be damaged if connected to conduit systems containing water - Article 300-5G of National Electric Code requires that "Conduits or raceways through which moisture may contact energized live parts shall be sealed or plugged at either or both ends".

*Deco Digital assumes no responsibility for claims arising out of improper or careless handling or installation of this product.

Installation Instructions

1. Prepare ceiling

- Install an Octagonal junction box (by others) in the ceiling, ensuring that the junction box can support 50 lbs minimum.
- Feed power into the junction box, following local and national electrical code standards.
- Ensure that circuit is not energized during installation.

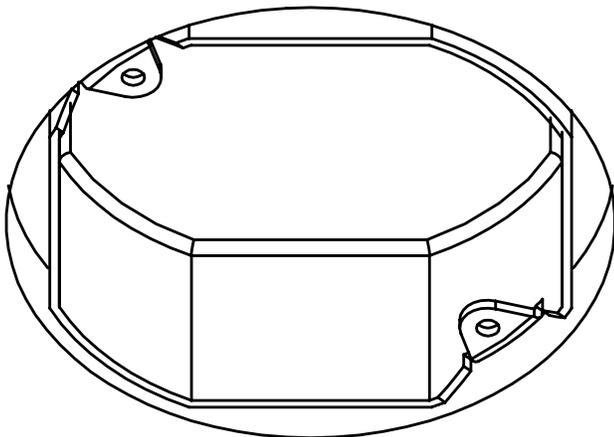

Deco Lighting practices a program of continuous product improvement, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

DECO® | LIGHTING 2917 Vail Ave., Commerce, CA 90040 • (800)613-DECO (3326) • info@getdeco.com www.getdeco.com


Circa

Ambient Interior Luminaire


Installation Instructions

2. Install driver box top section onto junction box.

- Feed wires through the central opening of the box.
- Fasten driver box top section to the junction box using the two 8-32 round head screws provided with the junction box.

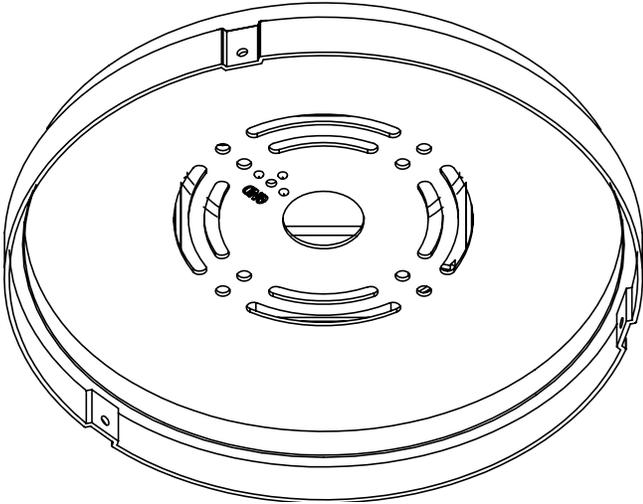

3. Make electrical connections to driver. Follow local and national building codes.

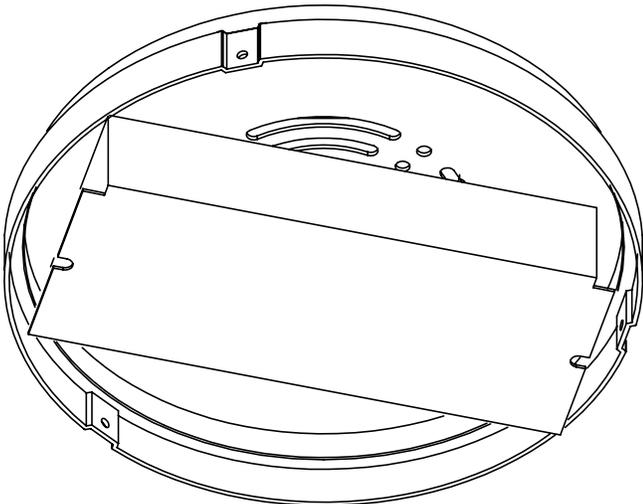


Circa

Ambient Interior Luminaire


Installation Instructions

4. Install driver box cover onto driver box top section using three 6-32 oval head screws provided. Twist cover until holes align.

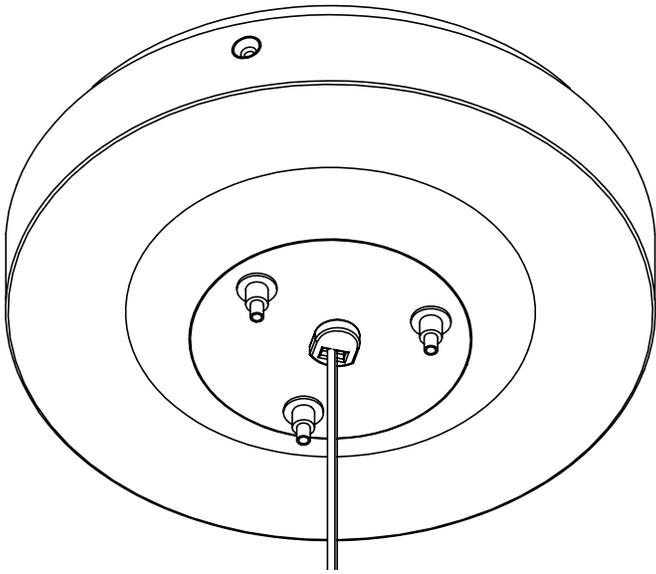

5. Install aircraft cable.

- There are three aircraft cables provided.
- Cut aircraft cables to roughly the desired length, leaving extra length of approximately 6 inches.

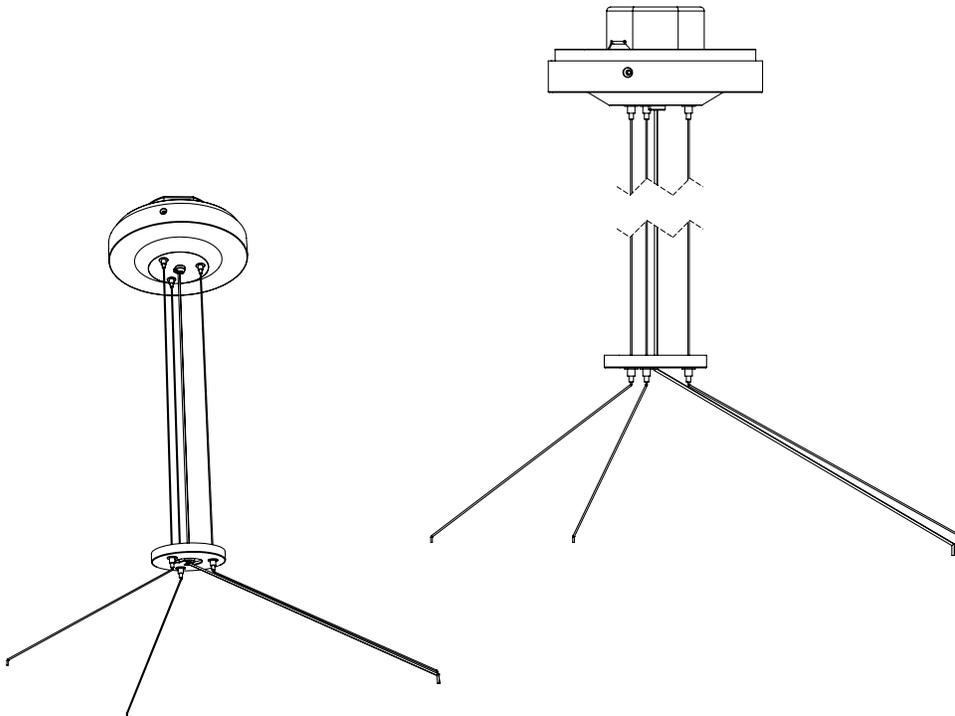


Deco Lighting practices a program of continuous product improvement, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

Circa

Ambient Interior Luminaire

Installation Instructions

- A ring accessory is provided. This ring allows the three cables to hang vertically for most of the total height.
- If desired, feed aircraft cables through the ring accessory from the smooth side of the ring.
- Feed ends of cables into the cable grippers in the driver box cover to the desired length. If pushed in too far, cables can be pulled out by first depressing on locking cylinder, then pulling of the cable while cylinder is depressed.

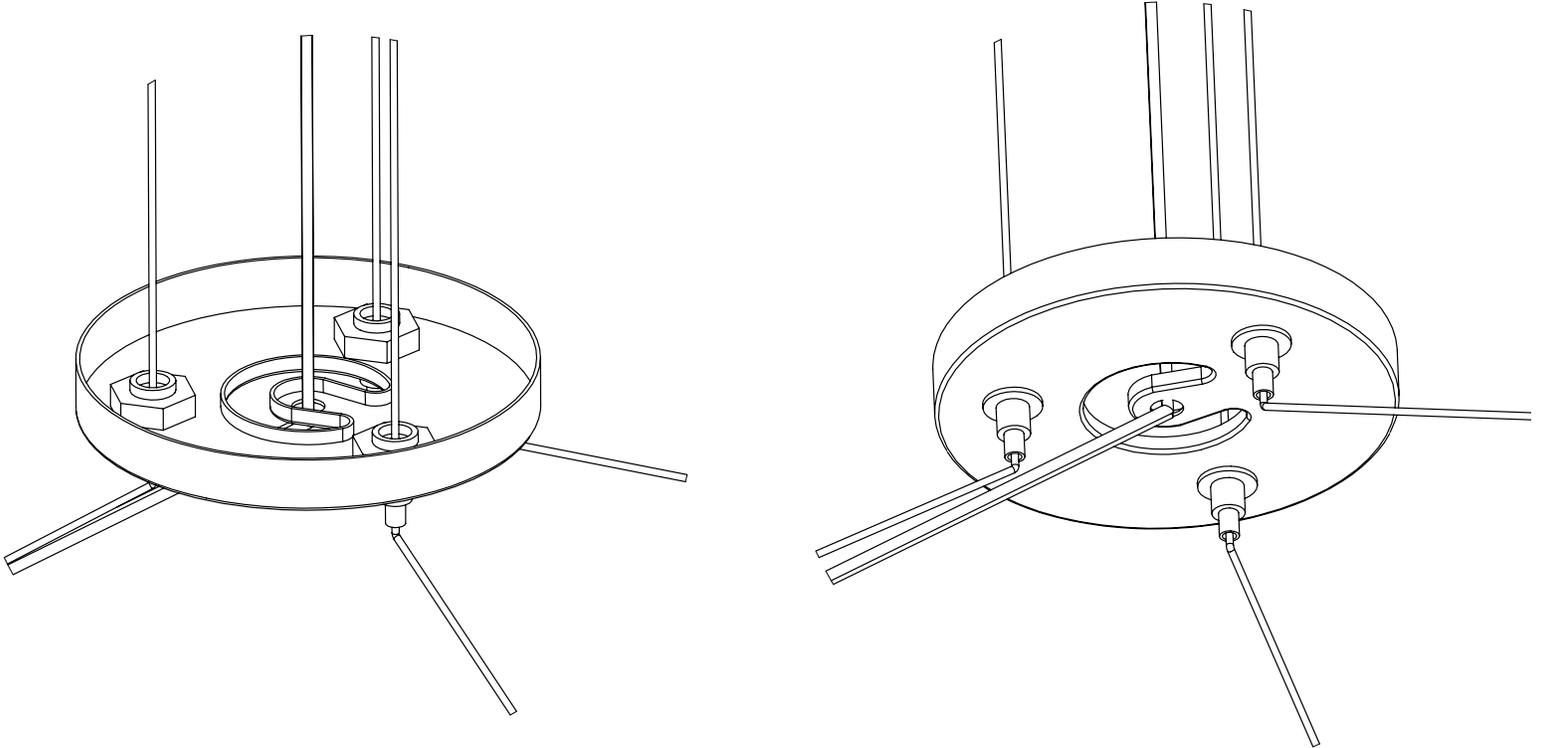

Deco Lighting practices a program of continuous product improvement, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.



Circa

Ambient Interior Luminaire

Installation Instructions

6. Install luminaire.

- Aircraft cables have cable terminals that thread onto threads on the top of the luminaire.
- Thread the terminals onto the threads for all three cables.
- Adjust height of ring accessory (if installed) to desired height.
- Adjust height of cables until luminaire is level.

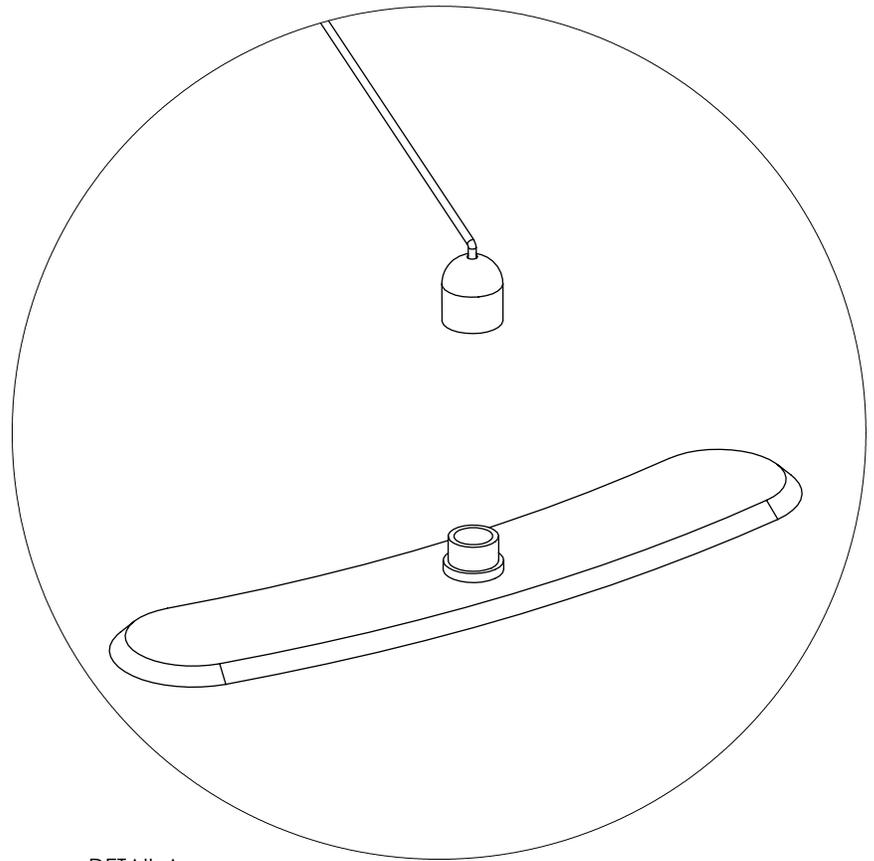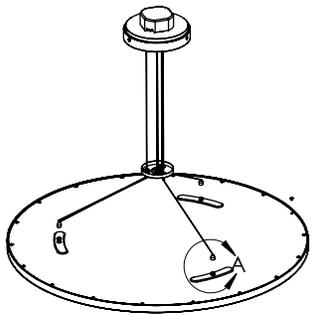

DETAIL A
SCALE 1 : 1

7. Connect power to luminaire.

- The power cord has two parts, one on the driver box, the other on the top of the luminaire.
- Adjust the length of the driver box cord as necessary.
- Connect the two sections of cord. The cord connectors push in, then twist to lock.

8. Circuit can now be energized.

Deco Lighting practices a program of continuous product improvement, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.