



# DECO MESH™ GO-LED Fixture Architectural LED Luminaire

Client: \_\_\_\_\_  
Project Name: \_\_\_\_\_

Order #: \_\_\_\_\_  
Type: \_\_\_\_\_ Qty: \_\_\_\_\_

## Performance Data

CRI

80+

CCT

3500K, 4000K, 500K, 5W

## Projected Lifetime

>54,000 Hours (L70);  
>51,000 Hours (L90)

## Dimming

0-10V Dimming Standard,  
10% to 100%

## Operating Temperature

-30°C to +50°C Ambient

## Safety Listed

UL and cUL, Suitable for dry  
and damp locations; IC-rated

## Warranty

5 year Standard  
10 year Optional



TEMPERSWITCH™  
3500 | 4000 | 5000

UL

Listed

DLC

Listed

10 Yr

Warranty  
Available

## Description

The design-driven Game Over LED Fixture features easy installation and delivers a cost-saving solution for upgrading fluorescent troffers or parabolics to LED technology. Ideal for commercial applications such as offices, classrooms, healthcare facilities, and retail spaces. All of Deco's Game Over LED Fixtures come standard dimmable and offer the most advanced LED technology on the market with efficacies of up to 140 lumens per watt. GO-LED Fixtures are manufactured with quality components and finishes, resulting in consistent and balanced lighting when mixing configurations in the same space. A main diffuser and slanted troffer reduce the GO Fixture's glare to provide soft, dispersed illumination with the comfort of inhabitants in mind. With their visual appeal and ease of installation, Deco's family of GO-LED Fixtures will transform and revamp any space in minutes.

## Features

- High reflectance optical engine delivers main beam focus through the optically designed acrylic lens.
- Linear ribbed acrylic lens overlay manages the balance of efficiency and aesthetics.
- Delivers efficacy of up to 140 lm/W
- Linear arrayed LED modules provide soft, but effective illumination.
- Ideal for recessed commercial applications such as office spaces, hospitals, educational facilities, transportation centers, etc.
- Frosted acrylic lens easily removes for cleaning.
- Architectural Narrow lens are standard.
- FCC Compliant
- Temperswitch allows users to select between 5000K, 4000K, and 3500K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.

# GO-LED 354050 U F BT

## Ordering Information

### A FIXTURE SERIES

GO-LED Game Over Architectural LED Fixture

### B SIZE

22 2 x 2  
24 2 x 4

### C WATTAGE/LUMENS (SIZE 22)

24 24W/3600<sup>1,2</sup>  
39 39W/5460<sup>1,2</sup>

### (SIZE 24)

32 32W/4480<sup>1,2</sup>  
39 39W/5460<sup>1,2</sup>

### D CCT

354050 3500K-4000K-5000K

### E VOLTAGE

U 120-277V

### F FIXTURE TYPE

F Fixture

### G CONTROLS

BT Bluetooth DECO Mesh™<sup>3</sup>

### H OPTIONS

E Emergency Backup

### I WARRANTY<sup>4</sup>

- 5 Year Warranty  
10 10 Year Warranty  
10L 10 Year Warranty including labor

<sup>1</sup> Delivered Lumens (3500K)

<sup>2</sup> DLC Premium

<sup>3</sup> 1% Dimming when ordered with Bluetooth


<sup>4</sup> 5 Year Warranty is Standard unless specified

**Dimensions**

|       | Length | Width  | Depth |
|-------|--------|--------|-------|
| 2 x 2 | 23.78" | 23.78" | 3.62" |
| 2 x 4 | 47.71" | 23.78" | 3.62" |


**Photometrics**

Polar Graph - 2x2 35W 4000K

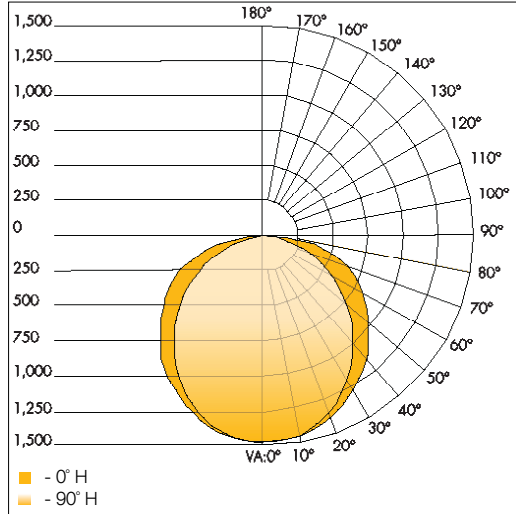

Delivered Lumens: 4409  
 CRI: 85

Polar Graph - 2x4 46W 4000K

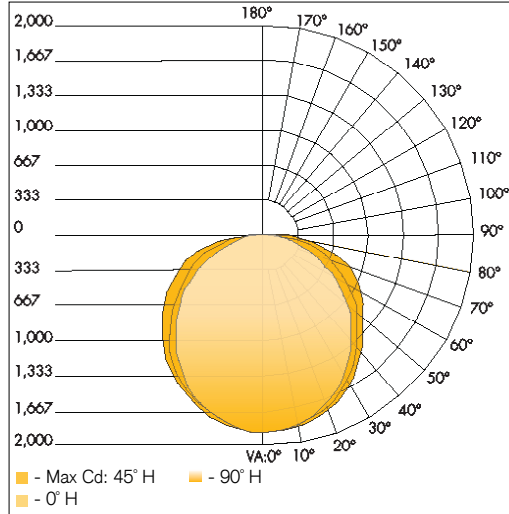

Delivered Lumens: 5770  
 CRI: 85

**Close-Up View**

