



D471-LED

Large Traditional Wall Pack

Client: _____
Project Name: _____

Order #: _____
Type: _____ Qty: _____

Performance Data

CRI
70+

CCT
4000K, 5000K

Projected Lifetime

50,000 Hours (L70);
50,000 Hours (L80)

Dimming



0-10V Dimming Standard,
100% down to 10%

Operating Temperature

-40°C to +40°C Ambient

ETL Listed

Suitable for dry, damp, wet
locations

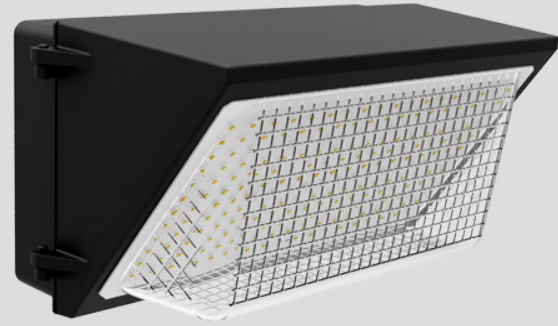


Description

The D471-L large wall pack provides a cost-effective, durable and efficient exterior light source for any application with maximum performance and minimum maintenance. The D471-LED delivers up to 130 lumens per watt of energy-efficient LED performance paired with a traditional design.

Features

- Heavy duty two piece die cast aluminium housing is top hinged for ease of maintenance. Two captive stainless steel door fasteners.
- 1/2" threaded conduit entry with coin plug.
- Weight: 12.1lbs (60W); 12.9lbs (80W); 13.4lbs (120W)
- Dark bronze polyester powder finish for excellent impact, corrosion and UV resistance.
- Clear prismatic borosilicate glass reflector is thermal/shock resistant.
- 10-Year Limited Warranty
- DLC Premium Listed



Ordering Information

A FIXTURE SERIES
D471-L Large Wall Pack

B WATTAGE/LUMENS

60	60W/7540 ^{1,3}
80	80W/10570 ^{1,3}
120	120W/14680 ^{1,3}

C CCT

40	4000K
50	5000K

D VOLTAGE

U	120-277V
---	----------

E FINISH
Z Bronze



F OPTIONS
T Push Button Photocell²

¹ Delivered lumens (4000K) - For 5000K multiply by 1.02

² Shipped separately

³ DLC Premium Listed


Dimensions

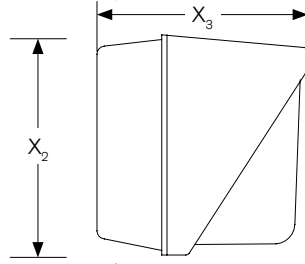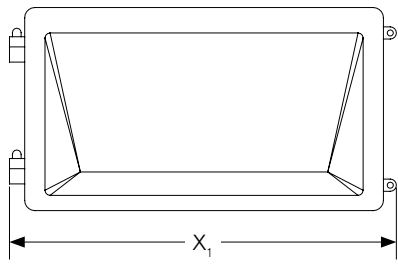


	Inches
X ₁	18.40
X ₂	9.10
X ₃	9.40

Photometrics

Model 120W 4000K

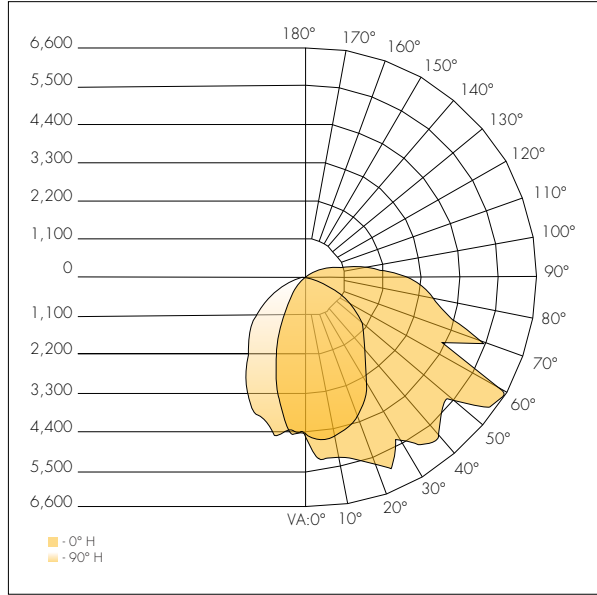

Isofootcandle

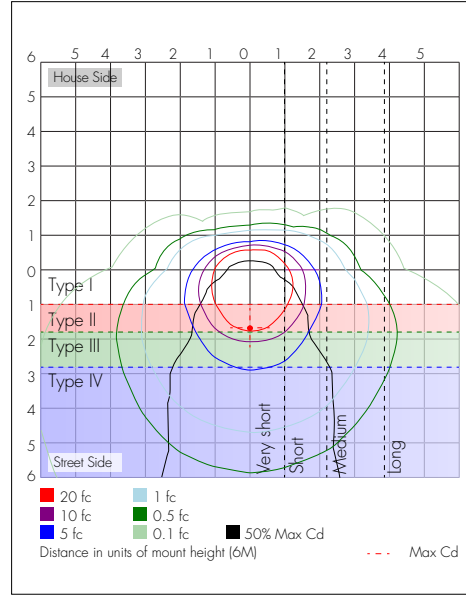

Zonal Lumen Summary

Zone	Lumens	%Luminaire	%Luminaire
0-30	3,370.4	23%	23%
0-40	5,243.9	35.7%	35.9%
0-60	9,157.5	62.4%	62.6%
60-90	4,289.2	29.2%	29.3%
70-100	3,196.7	21.8%	21.9%
90-120	1,097.8	7.5%	7.5%
0-90	13,446.6	91.6%	92%
90-180	1,177.2	8%	8%
0-180	14,623.8	99.6%	100%

DLC Premium Listed Models (Utility Rebates)

60W	80W	120W
D471-L6050UBZ	D471-86050UBZ	D471-L12050UBZ
D470-L6040UBZ	D471-L8040UBZ	D471-L12040UBZ